

EU-TYPE EXAMINATION CERTIFICATE

Shenzhen Kaifa Technology (Chengdu) Co., Ltd.
No. 99 Tianquan Rd., Hi-Tech Development Zone,
611730, Chengdu, P.R.C.

EU-Type Examination

Certificate No.

1606-23

Revision 2



Type MA110M
Object Electronic single-phase two-wire energy meter.
Direct connected

The object has been assessed and meets the requirements of

EU Directive 2014/32/EU,
Module B

The energy meter(s) meet(s) the essential requirements of Annex V of EU Directive 2014/32/EU, on the harmonization of the laws of Member States relating to the making available on the market of measuring instruments (recast).

This Certification is based on the report(s) listed in the report list in this Certificate.

This Certificate is valid until: December 11, 2034.

This Certificate comprises 8 pages in total.

Issued by KEMA B.V.
Klingelbeekseweg 195,
Arnhem, The Netherlands
Notified Body 2290

Alessandro Bertani
Director,
Services & Smart Technologies

Arnhem, December 11, 2024



REVISION OVERVIEW

The highest revision always replaces the earlier issued versions.

Rev. No.	Date of issue	Reason
0	October 11, 2023	First issue
1	August 29, 2024	Report 1648-24 added
2	December 11, 2024	<ul style="list-style-type: none">• Report 1756-24 added• Class A added

REPORT LIST


This Certificate is issued based on the following reports.

Report number	Revision	Firmware version
1605-23	R0	010001
1648-24	R0	010001
1756-24	R0	

1 TECHNICAL DATA

Manufacturer	Shenzhen Kaifa Technology (Chengdu) Co., Ltd., No. 99 Tianquan Rd., Hi-Tech Development Zone, 611730, Chengdu, P.R. China
Production location	Shenzhen Kaifa Technology (Chengdu) Co., Ltd., No. 99 Tianquan Rd., Hi-Tech Development Zone, 611730, Chengdu, P.R. China
Type	MA110M
Connection	Direct
Type of circuit	1P2W
Accuracy class Wh	1/A/B
Accuracy class varh	2
Meter constant	Optical Pulse output active: 500 - 10000 imp./kWh Optical Pulse output reactive: 500 - 10000 imp./kvarh
V range	230 V
I range I_{min} - I_n (I_{max})	0,25-5(60) A
Frequency	50 Hz
Temperature range	-40 .. 70 °C
Use	Indoor
IP rating	IP54
Protection Class	II
Impulse voltage	6 kV
Environmental class	M1, M2, E1 and E2, CISPR32 class B
LR Firmware ID	010001
LR Firmware CRC	5E192274
Register	LCD
Registry method(s):	Bi-directional method with separate registers: received- and delivered energy is added in separate registers.

2 PHOTOGRAPHS AND SEALING

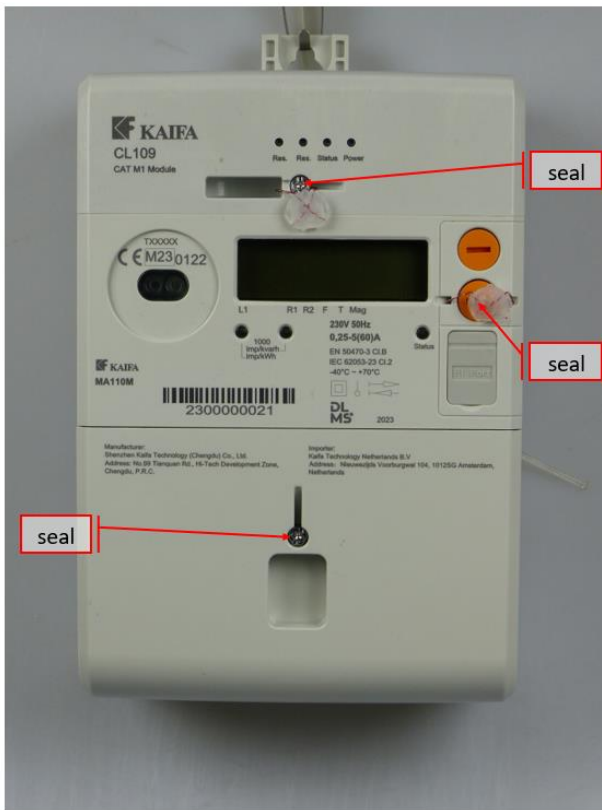

3 EXAMPLES OF NAME PLATES



4 CALCULATION OF THE COMPOSITE ERROR / MPE

During the type approval test the intrinsic errors for temperature, voltage and frequency variation are determined per load point. The composite error is determined with the following formula:

$$\varepsilon_m = \sqrt{\varepsilon^2(I, \cos\varphi) + \delta^2(T, I, \cos\varphi) + \delta^2(U, I, \cos\varphi) + \delta^2(f, I, \cos\varphi)}$$

Where

$\varepsilon^2(I, \cos\varphi)$ = Intrinsic error of the meter at a certain load

$\delta^2(T, I, \cos\varphi)$ = Additional error due to the variation of the temperature at the same load

$\delta^2(U, I, \cos\varphi)$ = Additional error due to the variation of the voltage at the same load

$\delta^2(f, I, \cos\varphi)$ = Additional error due to the variation of the frequency at the same load

Results are in the table below:

I in % of I _{ref}	cos φ	Composite error %							
		-40 °C	-25 °C	-10 °C	5 °C	30 °C	40 °C	55 °C	70 °C
5	1	1,01%	0,78%	0,57%	0,32%	0,23%	0,33%	0,47%	0,61%
10	1	1,01%	0,79%	0,56%	0,30%	0,17%	0,28%	0,43%	0,58%
10	0,5 ind.	1,03%	0,79%	0,57%	0,28%	0,18%	0,30%	0,47%	0,64%
10	0,8 cap.	1,00%	0,77%	0,57%	0,32%	0,23%	0,31%	0,45%	0,59%
I _{max}	1	1,00%	0,77%	0,53%	0,27%	0,15%	0,28%	0,42%	0,57%
I _{max}	0,5 ind.	1,04%	0,80%	0,56%	0,29%	0,16%	0,29%	0,45%	0,61%
I _{max}	0,8 cap.	0,99%	0,76%	0,52%	0,26%	0,16%	0,29%	0,43%	0,56%

5 OPTIONS AND VARIANTS

Overview of variants with details

Type designation	Details of the meter
MA110M	<ul style="list-style-type: none">• Communication options: 4G+2G CAT M1+NB CAT M1 RS485 P1 port Wired M-Bus Optical output• Pulse output (limited meter constant)• Auxiliary relay terminal• HAN port

END OF DOCUMENT

The laboratories of KEMA Labs are:

- CESI S.p.A., Milan, Italy.
- FGH Engineering & Test GmbH, Mannheim, Germany.
- IPH Institut "Prüffeld für elektrische Hochleistungstechnik" GmbH, Berlin, Germany.
- KEMA B.V., Arnhem, The Netherlands.
- KEMA Labs, Zkušebnictví, a.s., Prague, the Czech Republic.
- KEMA-Powertest, LLC, Chalfont, United States.